


Configuration	
Dash #	
-1	As shown




Revision				
ECO	Rev.	Description	Date	Approved
	A	Production release.	08/24/22	MKN/CAS

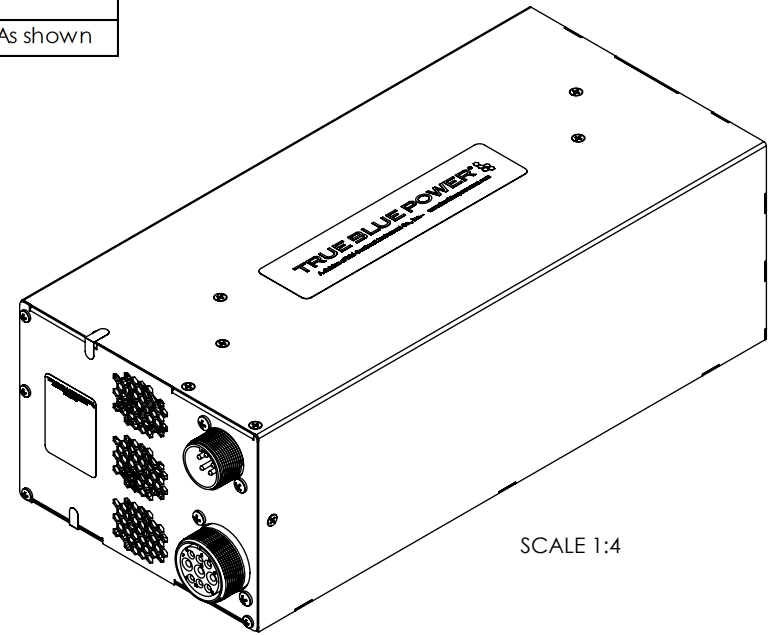

SCALE 1:4

Connector Pin-out		Connector Pin-out	
MS3102A24-11S		MS3102A18-11P	
Pin	Pin Function	Pin	Pin Function
A	Remote, On/Off	A	Input phase A
B	Remote Return	B	Input phase B
C	Fault	C	Input phase C
D	AC Output	D	Neutral
E	AC Return	E	Chassis GND
F	Chassis GND		
G	Fault RTN		
H	Spare		
I	Spare		

Specifications	
Model Number	TFC4000
Power Input	115/200 VAC, 3 phase, 360 - 800 Hz
Power Output	4.0 KVA, 115 VAC, 60 Hz
Power Factor	-0.8 to +0.8
Features	93% Efficiency, Remote ON/OFF, Sine Wave output, Single Phase Harmonic Distortion under 3%
Protection	Over temp, Short Circuit, Undervoltage, Overvoltage
Overload	150% for 5 minutes
Weight	19.8 lbs
Qualification	RTCA DO-160G (See manual)
Temperature	-55°C to +75°C
Altitude	55,000 feet
Mating Connector	9019110-4 and 9019507-2
Case	Anodized Aluminum, Blue
Install Manual	9019509

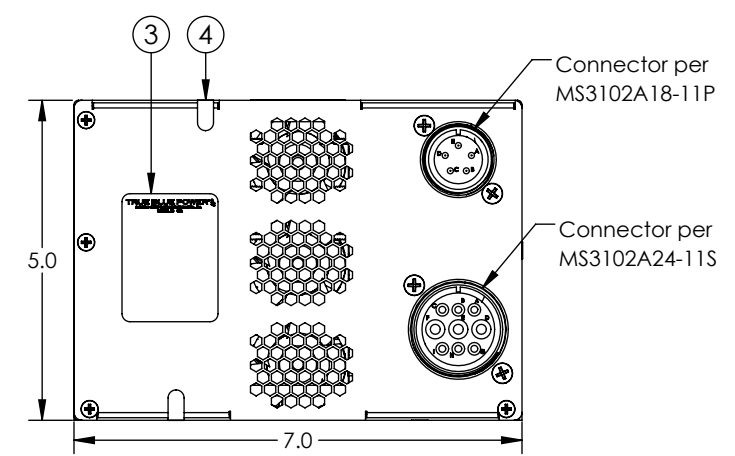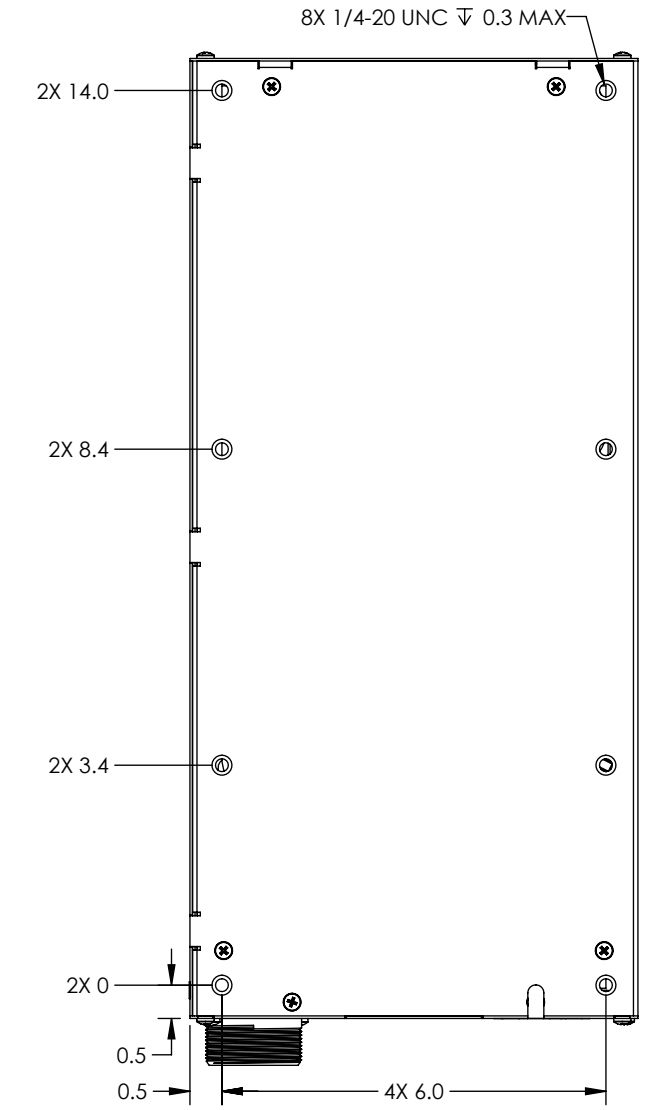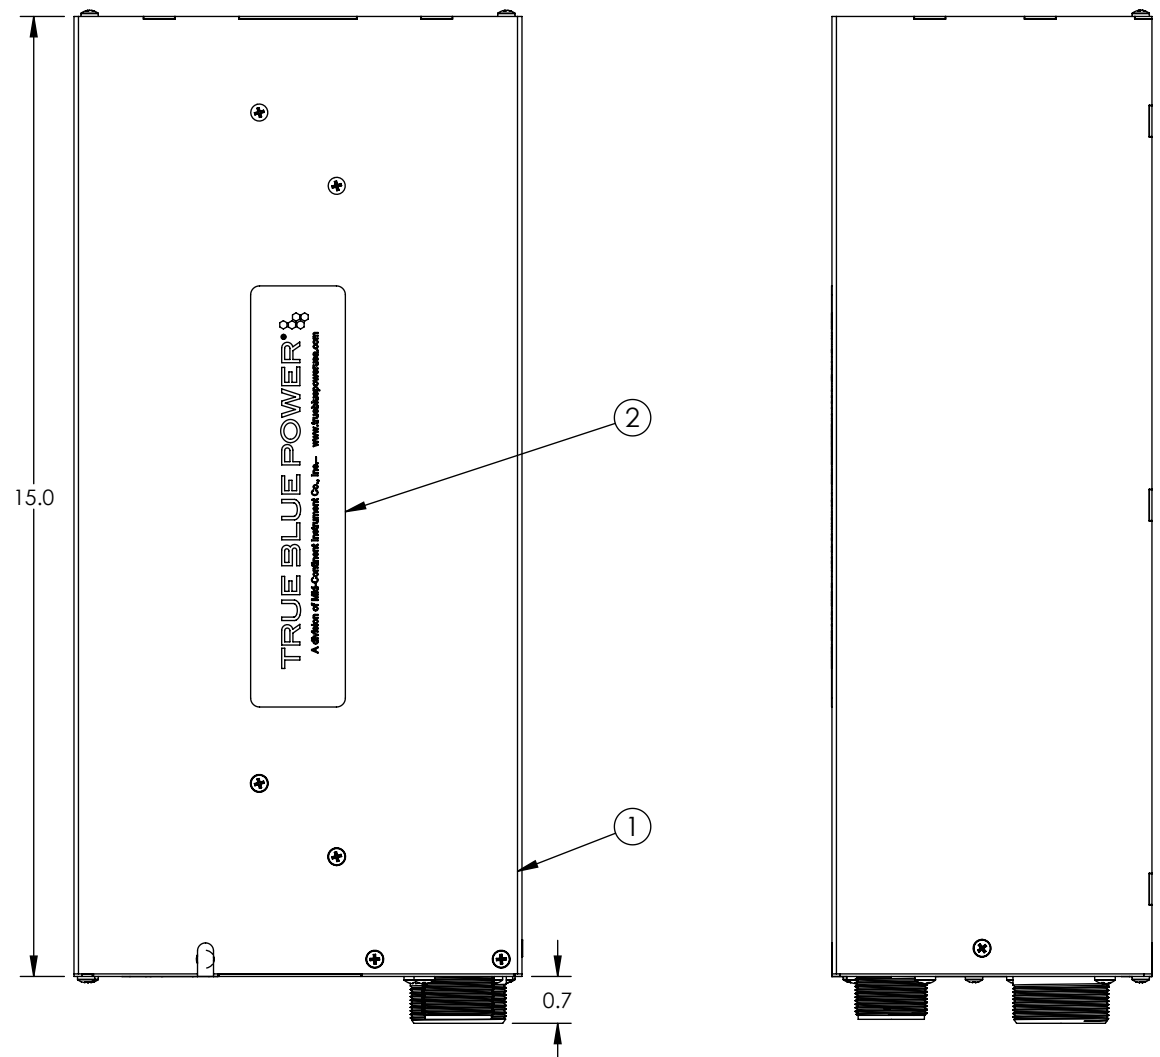

Item	Qty	Part Number	Description
1	1	9019516-1	Assy, Converter, TFC4000
2	1	9017130	Label, True Blue Power
3	1	9019508-1	Nameplate, TFC4000
4	2	6018956-1	Decal, Warranty

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES.  
 TOLERANCE:  
 .X= ±0.065  
 .XX= ±0.015  
 .XXX= ±0.005  
 .XXXX= ±0.002  
 ANGULAR= ±0.5°  
 WEIGHT N.T.E. +5%  
 BREAK ALL SHARP EDGES  
 THREADS PER MIL-S-7742

DRAWN:  
VAA  
06/09/2020  
  
APPROVED:  
CAS  
08/24/2022

This document discloses proprietary information of Mid-Continent Instrument Co., Inc. It may be reproduced or disclosed only with written permission of Mid-Continent Instrument Co. and is not to be used in any way detrimental to the interests of Mid-Continent Instrument Co., Inc.

TITLE:  
**Converter, TFC4000**



PART NUMBER:  
**6434000**